

Alpha 1 Technologies


HY-460

Transfer Conveyor




Overview

- Simple Design
- Anti static belts standard
- Available in standard or custom lengths
- SMEMA interfaces standard
- Standard SMEMA Height
- Adjustable width from 50mm to 460mm
- Optional two or three belt design
- Optional custom lengths available

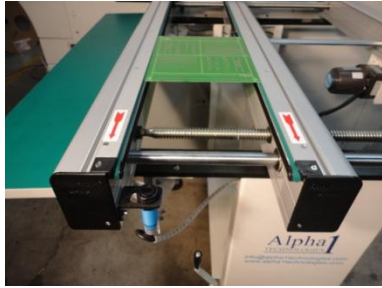

A simple design for a simple operation.

One gear motor for belt drive.

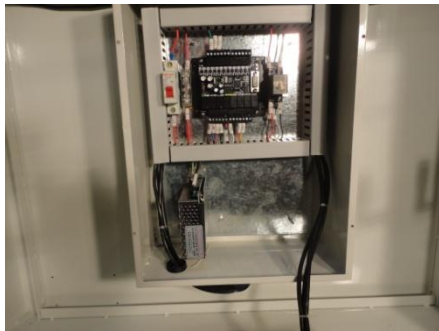

Using “Off the Shelf” components saves money and extends the life span of your equipment.

Rotary switch makes changing speed easy.



Alpha 1 Transfer Conveyors

Model	0.5 Meter	1.0 Meter	1.5 Meter	2.0 Meter
Conveyor Dimension (L x W x H)	500 x 895 x 930mm	1000 x 895 x 930mm	1500 x 895 x 930mm	2000 x 895 x 930mm
	19.7" x 35.2" x 36.6"	39.4" x 35.2" x 36.6"	59.1" x 35.2" x 36.6"	78.7" x 35.2" x 36.6"
Weight	100kg	110 kg	120 kg	130 kg
	220.5 lbs	242.5 lbs	264.5 lbs	286.6 lbs
Color	Grey White			
Board Size (Minimum L x W)	50 x 50mm	50 x 50mm	50 x 50mm	50 x 50mm
	1.97" x 1.97"	1.97" x 1.97"	1.97" x 1.97"	1.97" x 1.97"
Board Size (Maximum L x W)	500 x 460mm	500 x 460mm	500 x 460mm	500 x 460mm
	19.60" x 18.00"	19.60" x 18.00"	19.60" x 18.00"	19.60" x 18.00"
Compressed Air Requirement	N/A			
Power Requirement	120 ~230 VAC 50/60 Hz			
Features				
Direction	Left to Right		Optional: Right to Left	
Width Adjustment	Manual, T Screw			
Belts	Anti-Static			
Belt Section	One Belt		Optional: Two or Three Belt	
Control	PLC			
Interface Standard	SMEMA			
Lighting	Optional: Overhead Lighting			
Inspection	Optional: Inspection Stop			